



MJ2 Series 2-channel Fiber Optic Rotary Joint



www.princetel.com

Princetel, Inc.
4 Princess Rd Ste 209
Lawrenceville, NJ 08648
609.895.9890
fax 609.895.9552
info@princetel.com



MJ2 Series 2-channel Fiber Optic Rotary Joint


Description

The MJ2 series FORJs are mainly designed for multimode applications although one of the two channels can be singlemode. Dual-pass Fiberoptic Rotary Joints (FORJs) connect two independent fiber channels simultaneously. It allows uninterrupted transmission of optical signals while rotating along the common mechanical axis. Princetel's unique design has raised the standard for size and performance of two-channel FORJs.

Specification

Wavelength range	850-1650 nm
Insertion loss (MM)	<5 dB (3 dB typical)
Insertion loss (SM)	<5 dB (2 dB typical)
Insertion loss variation	<1 dB (typical)
Return loss (typical for SM)	20 dB
Cross talk (typical)	>50 dB
Maximum speed	100 rpm
Maximum fiber pulling force	10 N for 900 um buffered fiber
Optical power handling	23 dBm (Call for higher rating)
Working temperature	0 to 65 C
Storage temperature	-20 to 85 C
Pressure compensation	Call
Package Material	Stainless steel
Fiber type	Multimode or MM/SM
Jacket type	900 um buffer with 3 mm jacket
Connector type	FC, SC, ST, MTRJ, or LC
Dimensions	See drawings
Weight	~100 g

Mechanical

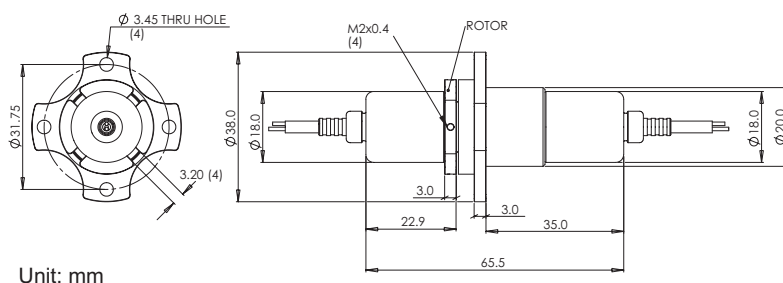


www.princetel.com

Princetel, Inc.
4 Princess Rd Ste 209
Lawrenceville, NJ 08648
609.895.9890
fax 609.895.9552
info@princetel.com



MJ2 Series 2-channel Fiber Optic Rotary Joint

Part Number

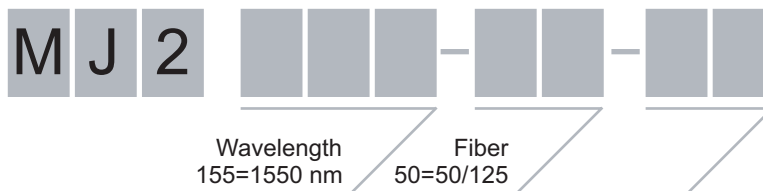

FC=FCPC
 FA=FCAPC
 SC=SCPC
 SA=SCAPC
 ST=ST
 LC=LC/PC
 LA=LC/APC

Wavelength and Fiber Code

Wavelength	Fiber
165=1625 nm	28=CorningSMF28 (1290-1650 nm)
162=1625 nm	13=Fujikura SM13 PANDA fiber
159=1590 nm	15=Fujikura SM15 PANDA fiber
155=1550 nm	56=3M FS-SN5624 (980 nm)
153=1530 nm	42=3M FS-SN4224 (850 nm)
148=1480 nm	32=3M FS-SN3224 (635 nm)
131=1310 nm	50=50/125 multimode
980=980 nm	62=62.5/125 multimode
850=850 nm	10=100/125 multimode
780=780 nm	20=200/240 multimode
670=670 nm	40=400/425 multimode
650=650 nm	60=600/630 multimode
635=635 nm	01=1000 um Mitsubishi plastic

www.princetel.com

Princetel, Inc.
 4 Princess Rd Ste 209
 Lawrenceville, NJ 08648
 609.895.9890
 fax 609.895.9552
 info@princetel.com